

IPC-WP-028

2024 - March

Guidance on Objective Evidence for Validating the Acceptability of Bubbles in Conformal Coatings

A White Paper Report Developed by IPC



BUILD ELECTRONICS BETTER

IPC Mission

IPC is a global trade association dedicated to furthering the competitive excellence and financial success of its members, who are participants in the electronics industry.

In pursuit of these objectives, IPC will devote resources to management improvement and technology enhancement programs, the creation of relevant standards, protection of the environment, and pertinent government relations.

IPC encourages the active participation of all its members in these activities and commits to full cooperation with all related organizations.

About IPC Standards

IPC standards and publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for their particular need. Existence of such IPC standards and publications shall not in any respect preclude any entity from manufacturing or selling products not conforming to such IPC standards and publication, nor shall the existence of such IPC standards and publications preclude their voluntary use.

IPC standards and publications are approved by IPC committees without regard to whether the IPC standards or publications may involve patents on articles, materials or processes. By such action, IPC does not assume any liability to any patent owner, nor does IPC assume any obligation whatsoever to parties adopting an IPC standard or publication. Users are wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

IPC Position Statement on Specification Revision Change

The use and implementation of IPC standards and publications are voluntary and part of a relationship entered into by customer and supplier. When an IPC standard or publication is revised or amended, the use of the latest revision or amendment as part of an existing relationship is not automatic unless required by the contract. IPC recommends the use of the latest revision or amendment.

Standards Improvement Recommendations

IPC welcomes comments for improvements to any standard in its library. All comments will be provided to the appropriate committee.

If a change to technical content is requested, data to support the request is recommended. Technical comments to include new technologies or make changes to published requirements should be accompanied by technical data to support the request. This information will be used by the committee to resolve the comment.

To submit your comments, visit the IPC Status of Standardization page at www.ipc.org/status.



IPC-WP-028

Guidance on Objective Evidence for Validating the Acceptability of Bubbles in Conformal Coatings

If a conflict occurs between the English language and translated versions of this document, the English version will take precedence.

Developed by Team Champagne (5-22A-AT-CHAMPAGNE) of the J-STD-001 Task Group (5-22A) of IPC

Users of this publication are encouraged to participate in the development of future revisions.

Contact:

IPC
3000 Lakeside Drive, Suite 105N
Bannockburn, Illinois
60015-1249
Tel 847 615.7100
Fax 847 615.7105

This Page Intentionally Left Blank

Acknowledgment

Members of 5-22A-AT-CHAMPAGNE Team Champagne of the 5-22A J-STD-001 Task Group worked to develop this document. IPC thanks them for their service and dedication to this effort. Any document involving a complex technology draws material from a vast number of sources across many continents. While the principal members of 5-22A-AT-CHAMPAGNE Team Champagne of the 5-22A J-STD-001 Task Group are shown below, it is not possible to include all of those who assisted in the evolution of this white paper. To each of them, the members of the IPC extend their gratitude.

5-22A-AT-CHAMPAGNE Team Champagne

Chair

Udo Welzel
Robert Bosch GmbH

5-22A J-STD-001 Task Group

Cochairs

Milea Kammer
Honeywell Aerospace
Jonathon Vermillion
Ball Aerospace &
Technologies Corp.
Jarrod Webb
Lockheed Martin Missiles &
Fire Control

Technical Liaison of the IPC Board of Directors

Robert (Bob) Neves
Microtek Laboratories China

Members of 5-22A-AT-CHAMPAGNE Team Champagne

Erik Bjerke

BAE Systems

Jonathon Vermillion

Ball Aerospace & Technologies
Corp.

Gerald Leslie Bogert

Bechtel Plant Machinery, Inc.

Tiberiu Baranyi

Flextronics Romania SRL

Tony Feldmeier

Honeywell Aerospace

Milea Kammer

Honeywell Aerospace

Christina Rutherford

Honeywell Aerospace

Ben Gumpert

Lockheed Martin Missiles & Fire
Control

Sharissa Johns

Lockheed Martin Missiles & Fire
Control

Randy Bremner

Northrop Grumman

Udo Welzel

Robert Bosch GmbH

Paul Zutter

U.S. Army Aviation & Missile
Command

This Page Intentionally Left Blank

Table of Contents

Overview 1

General remark 1

Terminology 2

Bubble 2

Coating void 3

Fisheye 3

Surface Insulation Resistance (SIR) 4

Obtaining Objective Evidence for the Benign Nature of Bubbles 4

Experimental Approach Involving Test Boards 4

Field records 6

Production qualification testing 6

Changes Applied to J-STD-001H and IPC-A-610H 7

References 8

Figures

Figure 1 Venn diagram illustrating the variables affecting electrochemical failure 1

Figure 2 Non-bridging bubbles and bridging bubbles (schematic drawing) 2

Figure 3 Bubbles at a conformally coated QFN 2

Figure 4 Bubbles at a conformally coated QFN
(horizontal cross section – left-hand side, schematic drawing – right-hand side) 3

Figure 5 Cross-sectional schematic view of a fisheye 3

Tables

Table 1 Bubble opportunities of B52 test boards for a single (third column) and ten B52 boards (fourth column)..... 4

This Page Intentionally Left Blank

IPC-WP-028

Guidance on Objective Evidence for Validating the Acceptability of Bubbles in Conformal Coatings

Overview

Conformal coatings are used to increase the robustness of electronic assemblies against condensation risk and as protection against particles. The protection function is of highest priority for components with small pitch or low pin distances where the risk of bridging by water droplets or particles leading to an electric short is most critical. The trends of miniaturization and use in harsher environments combined with increasing lifetime expectations frequently requires electronic assemblies to be protected by conformal coatings.

The electrochemical performance of coated assemblies can be characterized by following the mindset of IPC-9202 test protocol where the package design effects on the ionic contamination, on the bias and on the present local humidity are taken into consideration, see Figure 1. Interactions of material and processes are evaluated during the surface insulation resistance (SIR) test using an assembled test board like B52 test PCB.

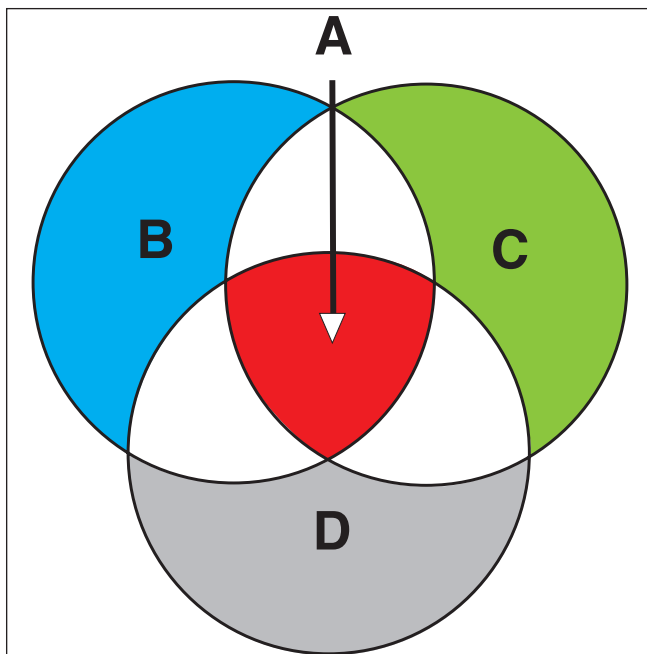


Figure 1. Venn diagram illustrating the variables affecting electrochemical failure

A. Electrochemical Failure Region	C. Bias
B. Humidity	D. Ionic Contamination

The concern of bridging bubbles in coatings is to activate a microclimate where humidity can condensate inside the bubbles and increase the local humidity load to a critical level. When adjacent non-common conductors are not protected by an insulating coating layer, an electric shortage failure by electrochemical migration can occur. This same concern applies to bridging bubbles between adjacent non-common conductors under components which can be the case for leadless components. Such bubbles under the component are not found by optical inspection; only destructive testing or removal of the component will exhibit the non-coverage of conformal coating. This difficulty in inspecting hidden terminations is described in the IPC-HDBK-830 and a solution for coating inspection for terminations is not available.

It is the purpose of this white paper to provide guidance on obtaining objective evidence for validating the acceptability of bubbles in conformal coatings.

General remark

This white paper focuses on a failure mode where bubbles in coatings could activate a microclimate involving condensation of humidity inside the bubbles resulting in an increase of the local humidity load to a critical level, thus generating electrochemical migration failures.

The use of coating as a mitigation measure against risks related to growth of whiskers is not considered in this white paper.